

Blasting Measurement Geophone

FOR USE WITH ECHOPRO & FUSION BLAST MONITOR

FEATURES


- 4.5Hz, 8Hz, 10Hz, 14Hz, 15Hz sensors available
- Large bandwidth
- Aluminium body or PVC housing
- High resistance to water ingress
- High pressure applications
- High temperature option available
- Low cost & excellent reliability

APPLICATIONS

ES&S geophones are commonly used in mining applications often implemented in combination with accelerometers. Geophone configurations can be uniaxial, biaxial or triaxial. Various sensors offer different advantages namely frequency range, amplitude, temperature, reliability and price.

Beneficial features of our geophones are their long term stability, reliability, accuracy, large bandwidth and low cost. ES&S offers a wide range of frequencies 4.5Hz, 8Hz, 10Hz, 14Hz & 15Hz. ES&S can customize borehole geophones and our engineers are happy to discuss the most suitable configuration to suit your requirements.

SENSORS

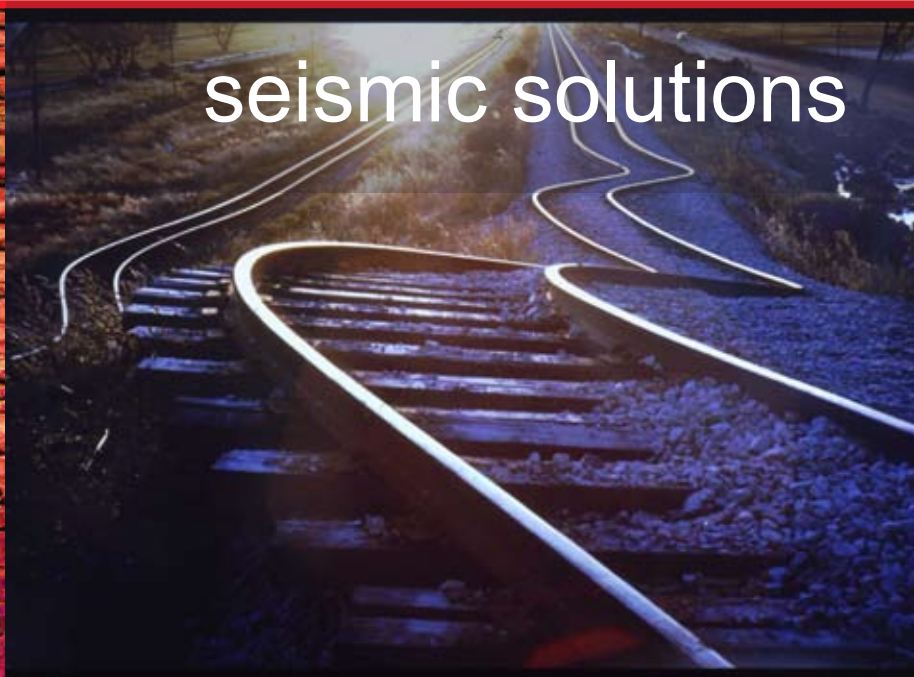

Perfect for Compliance
Monitoring and other air pressure
monitoring applications.

TECHNICAL SPECIFICATIONS

	4.5 Hz Version	14 Hz Version
Resonance Frequency:	4.5 Hz	14 Hz
Sensitivity:	28 V/m/s tolerance $\pm 5\%$	28 V/m/s
Distortion coil to case frequency:	<0.3%	<0.2%
Open circuit dampening:	0.265 $\pm 5\%$ tolerance	0.18 $\pm 5\%$ tolerance
Operating Temperature:	-40° - 100°C	-40° - 100°C
Moving Mass:	16.1g	12g
Distortion measurement Frequency:	12 Hz	14 Hz

OPERATING PRINCIPLE

ES&S geophones feature excellent reliability, high accuracy, low cost and rugged water proof housing. ES&S custom builds and assembles borehole geophones specific to your requirements. Our engineers welcome any opportunity to discuss the most suitable configuration for your application.